

Material Features :



- High-pressure die-cast aluminum Control gear Housing and aluminum sheet metal deep drawn Canopy, treated with anti-corrosion electrostatic powder painting
- High temperature-proof silicon gasket, PC diffuser with UV Stabilized.

Applicable Places :



Illumination of Urban business areas, Parks, Pavements, Scenery avenues, Pedestrian streets etc

IP65 Class I     



ELZD8501

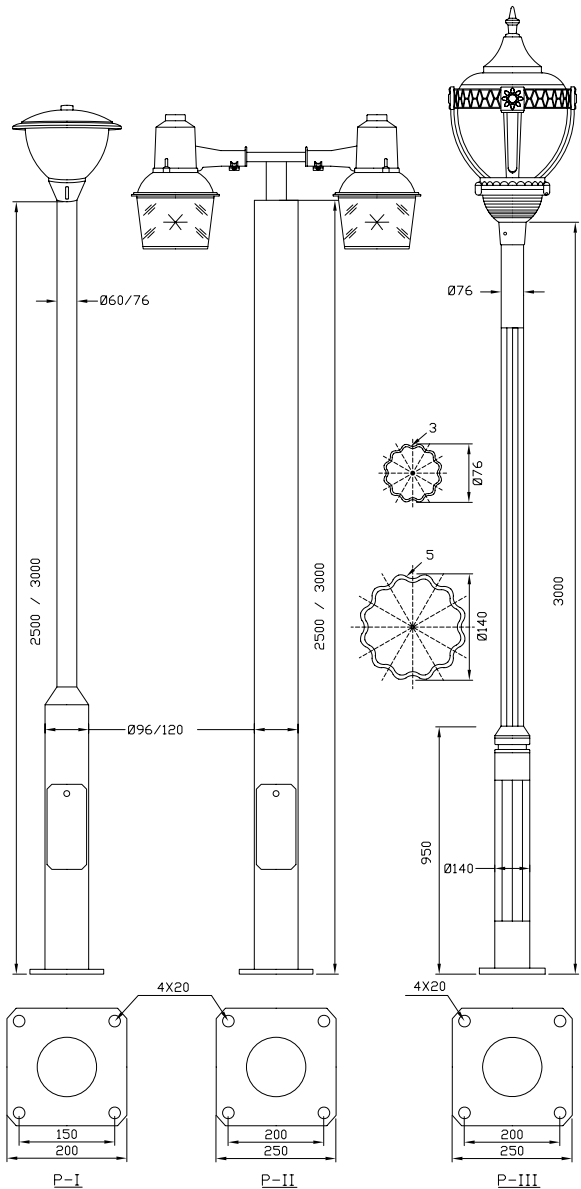

ELZD8434

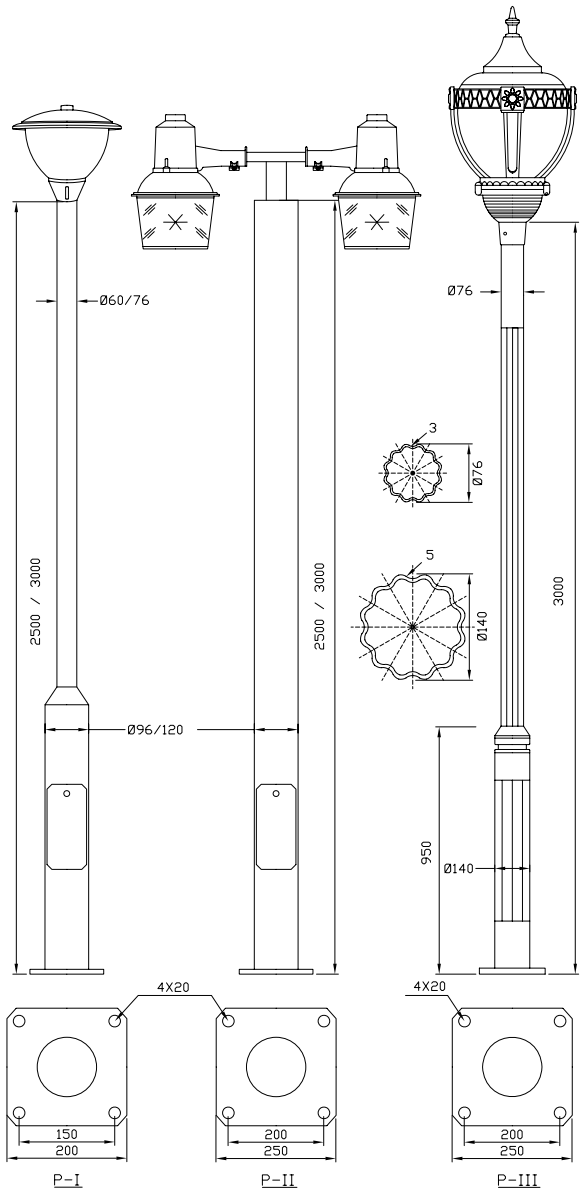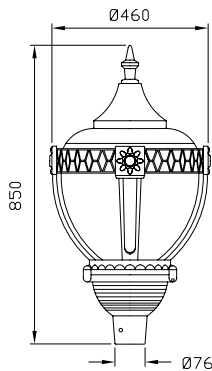

ELZD39

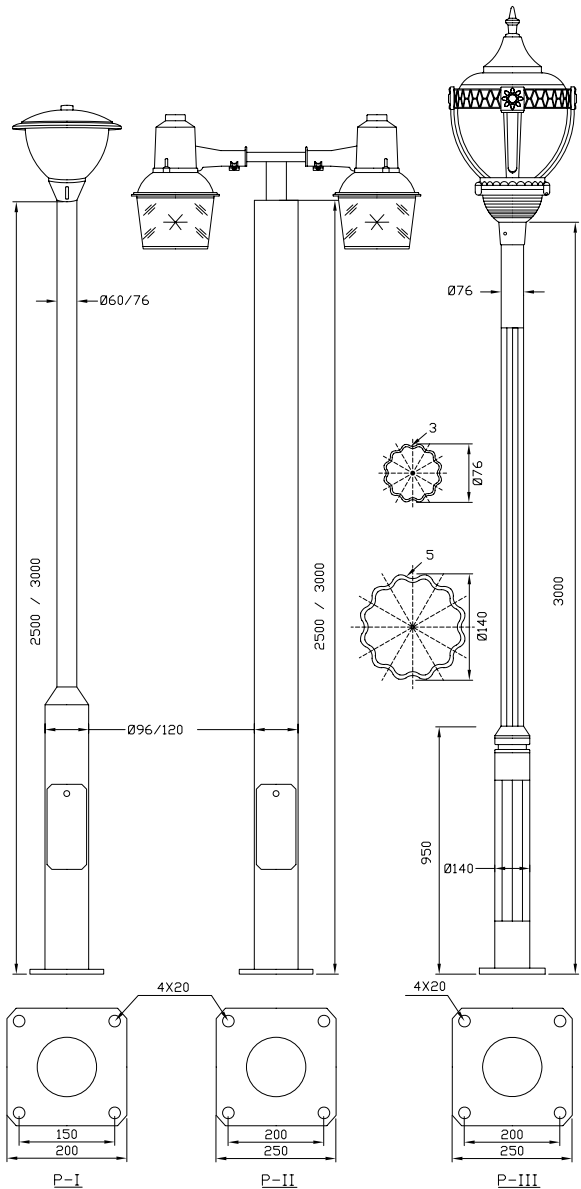

Model No	Light Source	Power W	Power factor pf	Input Voltage V/Hz	Lamp Type	Lamp Life Hr
ELZD8501	HPS/MH	70~150	>0.85	220~240V/ 50-60Hz	E 27/40	24000 / 12000
ELZD8434	HPS/MH	70~150	>0.85	220~240V/ 50-60Hz	E 27/40	24000 / 12000
ELZD39	HPS/MH	70~150	>0.85	220~240V/ 50-60Hz	E 27/40	24000 / 12000