



**Material Features:**


- High-pressure die-casting aluminum body, treated with electrostatic powder spraying
- High temperature-proof silicon gasket, Tempered safety glass
- High purity aluminum reflector treated with anodized oxidation and the reflector has double sealing structure.

**Applicable places:**


- Illumination of the Urban Roads, Highways, Over-head Roads, Bridges and Residential Layouts etc.

IP66 Class I    


**ELZD803-II**

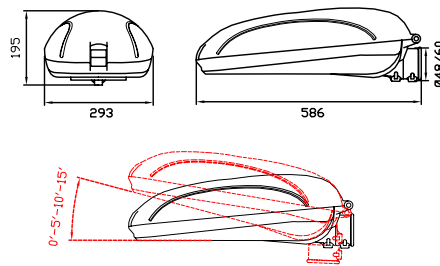


Light Distribution Curve (Cd/1000lm)

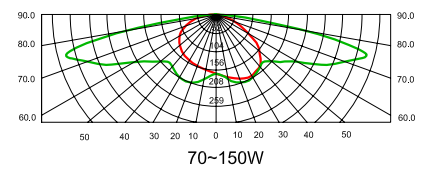


**ELZD803-IV**

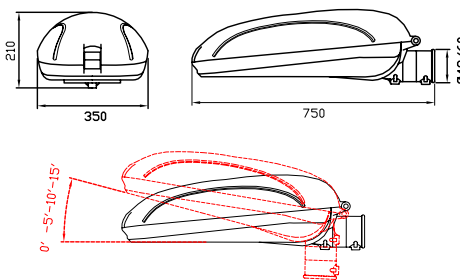


Light Distribution Curve (Cd/1000lm)

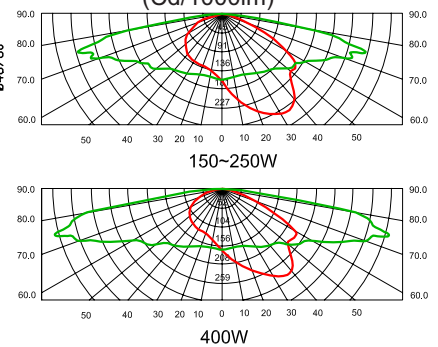

**ELZD803-V**

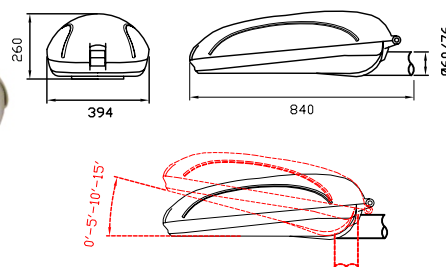

Light Distribution Curve (Cd/1000lm)

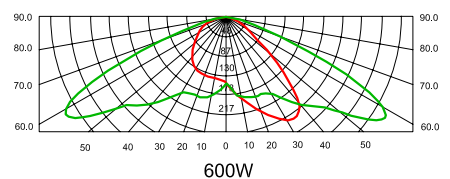

Model No	Light Source	Power W	Power factor pf	Input Voltage V/Hz	Lamp Type	Lamp Life Hr
ELZD803-II	HPS/MH	70~150	>0.85	220~240V/ 50-60Hz	E27/40	24000 / 12000
ELZD803-IV	HPS/MH	150~400	>0.85	220~240V/ 50-60Hz	E40	24000 / 12000
ELZD803-V	HPS	600	>0.85	220~240V/ 50-60Hz	E40	24000 / 12000